

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 July 2003 (31.07.2003)


PCT

(10) International Publication Number
WO 03/062497 A1

- (51) International Patent Classification⁷: C25C 7/02 (74) Agent: BALDWIN SHELSTON WATERS; 60 Margaret Street, Sydney, NSW 2000 (AU).
- (21) International Application Number: PCT/AU03/00086
- (22) International Filing Date: 28 January 2003 (28.01.2003) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
PS 0159 25 January 2002 (25.01.2002) AU
- (71) Applicant (*for all designated States except US*): MOUNT ISA MINES LIMITED [AU/AU]; 410 Ann Street, Brisbane, QLD 4000 (AU).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): WEBB, Wayne, Keith [AU/AU]; 75 Thirteenth Avenue, Railway East, QLD 4810 (AU).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HANGER BAR

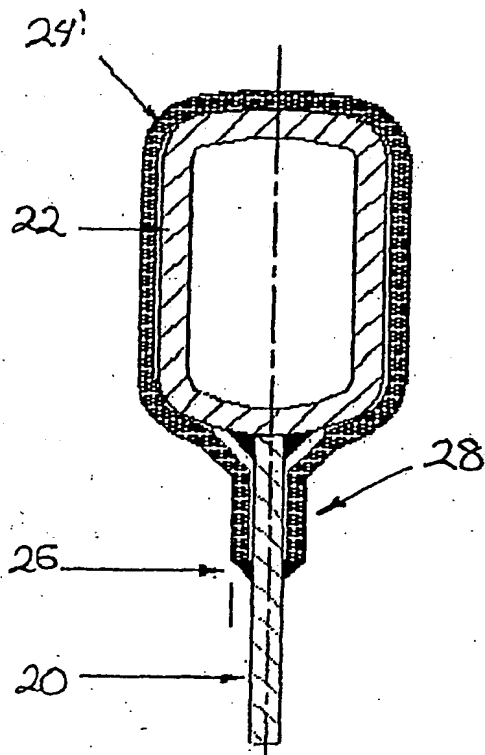

(57) **Abstract.** A hanger bar (22) for a cathode plate (20) and a method of producing a cathode (1) for electrolytic recovery of metal. The hanger bar comprises a support element (22) which is preferably stainless steel and hollow. An electrically conductive metal cladding (24) is affixed to the stainless steel bar by any appropriate mechanism, eg interference fit, welding, chemical or mechanical fastening or coextrusion or roll forming. Affixing the cladding to the stainless steel support element has significant advantages over conventional electroplating techniques including that a more precise engineering specification can be applied to the cladding thickness. This is important to maintain vertical alignment of the cathode plate in the electrolytic cell.